



AC POWERED SCHEDULING SWITCH

Smart Lighting Switch, with Scheduling Functions

WORKS WITH: SENSOR CONNECT ENABLED LIGHTS, IDEAL FOR RETROFIT


Easy replacement for new or existing switch locations, the RCA smart lighting switch fits into a standard wallbox (deep preferred) and can control multiple smart light groups. Integrated real time clock helps save energy with set-scheduling, and it has a two-wire build which makes it ideal for retrofit applications.

Easy replacement for new or existing switch locations.

Fits into Standard wallbox

Two-wire (non-neutral) works for retrofit applications

Control 2 Groups of Lights, ON/OFF/Dimming

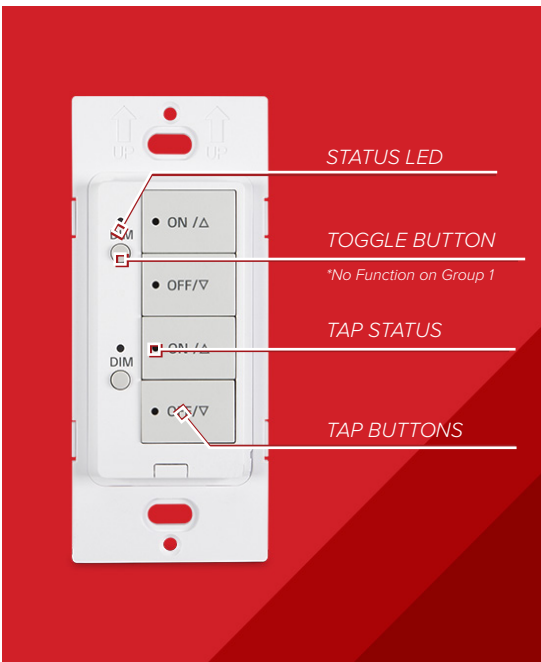

Group Control Functions

The RCA Scheduling Switch (LGE-SWITCH-4B-AC) can control multiple light groups. Use the 'Tap Buttons' 1 & 2 to control ON/OFF and Dimming Functions for 1 group of lights, and 'Tap Buttons' 3 & 4 to control ON/OFF and Dimming for a 2nd set of lights.

SCHEDULING SWITCH INSTRUCTIONS

How to use the RCA Scheduling Switch

Group 1 Tap Buttons

Group 2 Tap Buttons

1	Group 1 ON Controls Group 1 Lights	Group 1 ON/DIM UP Controls Group 1 Lights
2	Group 1 DIM UP Controls Group 1 Lights	Group 1 OFF/DIM DOWN Controls Group 1 Lights
3	Group 1 DIM DOWN Controls Group 1 Lights	Group 2 ON/DIM UP Controls Group 2 Lights
4	Group 1 OFF Controls Group 1 Lights	Group 2 OFF/DIM DOWN Controls Group 2 Lights

Ordering Information (Use Model Numbers column for ordering)

Example: LGE-SWITCH-2B-AC

Product	Product Type	Model Number	Power	Voltage	Frequency	Range	Dims	Weight	Operating Temp	Controls
Scheduling Switch AC Powered	1 - Group (4 Buttons)	LGE-SWITCH-2B-AC	Max, 0.5	120 - 277 VAC	2405 ~ 2480 Mhz	98.4 ft.	1.75" x 4.12" x 1.68"	5.1 oz	-4° to 122° F	ZigBee
	2 - Group (4 Buttons)	LGE-SWITCH-4B-AC								