



ZIGBEE TO ANALOG TRANSFORMER 1.0

Convert lights to work with RCA Sensor Connect


WORKS WITH: ANY LED LIGHT OR AC LOAD

- Applied Internal Load Switch to Control AC main On/Off
- Integrated AC-DC supply for stand-alone operation
- Support 1 - 10V Dimming
- 2.4 GHz ZigBee® Transceiver
- Embedded Antenna for Easy Installation
- Flexible Platform to accommodate diverse protocols
- Supports RCA Sensor Connect and Daintree Networks ControlScope
- DLC, NLC, QPL Listed Lighting Accessory

Add Wireless Control to Any Light or Room

The ZAT is the perfect solution for existing spaces with traditional lighting controls, that are looking to upgrade to a smart lighting setup. The ZAT is easy to wire to an existing LED driver, and can function as a stand-alone light control, a room controller, or a motion sensor for your zigbee network.


See the ZAT wiring diagram

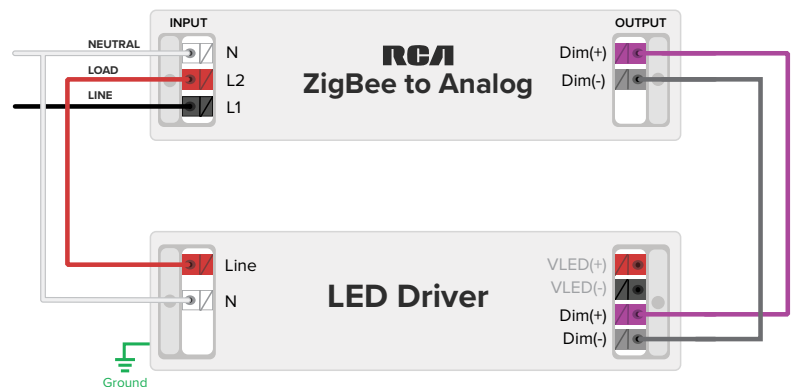

Accessories

Protective

RCA-ZJB
Junction Box
Protective Enclosure
Included



Multi-Sensors

RCA-MULTI-SENSOR
Occupancy Sensor
Wireless Control



Wireless Dongles

LGE-DONGLE-VLC
Wireless
Communication Only



SPECIFICATIONS

Model Number	LGE-ZAT	Load Types	Electronic Ballast, General LED Driver
Voltage	120 - 277 Vac	Load	8 A
Frequency	50/60 Hz	Size	1.0" x 1.28" x 9.06"
Dimming	1 - 10 Vdc	Weight	0.4 oz
Operating Temperature	-4° to 158° F (-22° to 70° C)	Certifications	DLC, NLC, QPL Listed